



SPHENIX EMCAL Update

Vera Loggins
University of Illinois Urbana-Champaign
July 20, 2015

EMCAL Results

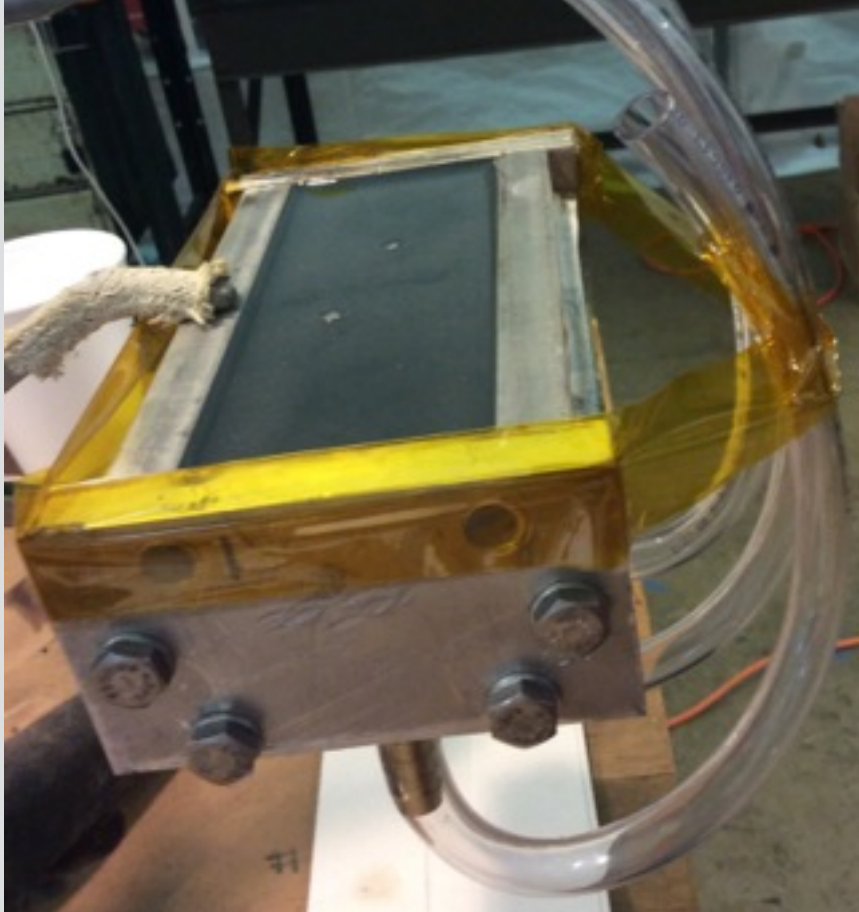

epoxy added from the top and is drained down through the module

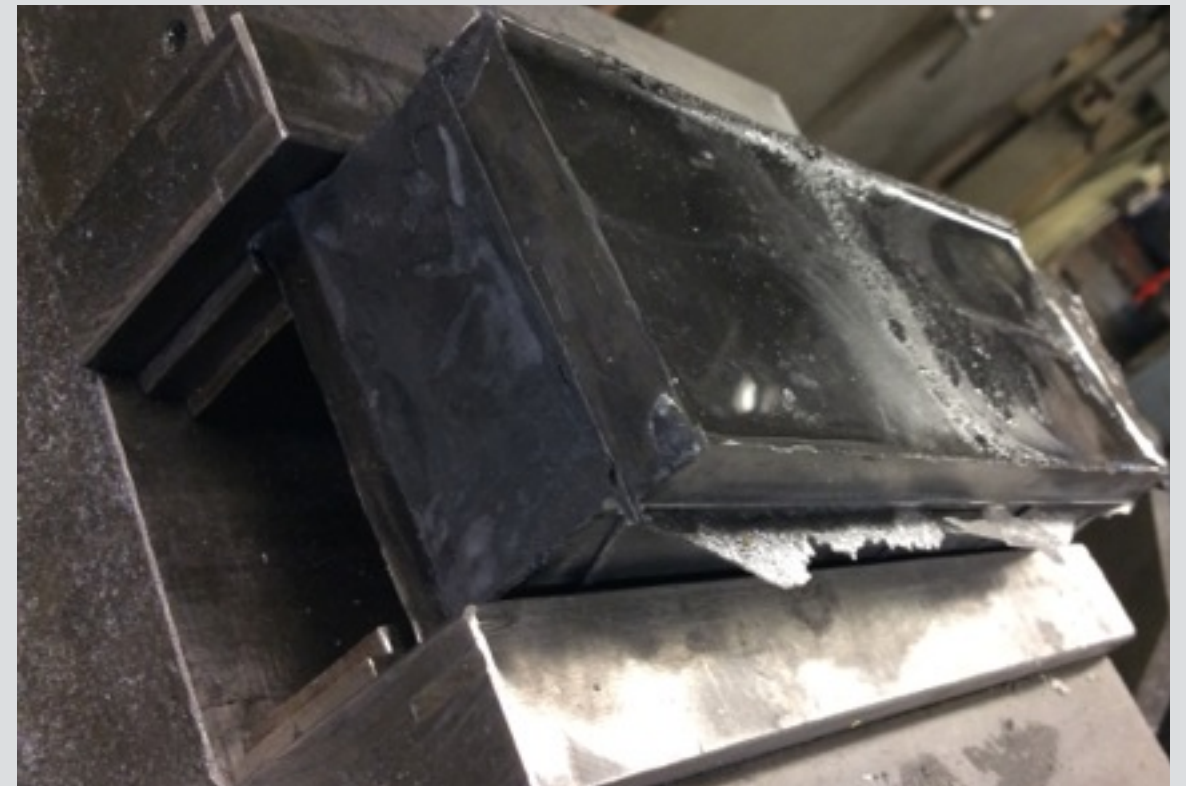

bathtub method applied to both sides, each side has an epoxy layer

We plan to machine off the epoxy on both sides and get measured density for the module.

Final Density Value



**Final density value:
9.17 g/cm³**

Note: we are next investigating if we can do one bathtub fill without having dry powder. We are now repeating this procedure.

