

# **A proximity-focusing RICH for the ePIC electron endcap**

***BNL***

***Duke***

***INFN Trieste***

***MSU***


***Stony Brook***

***[IJS Ljubljana]***


***...***

# Detector concept

- Recycle pfRICH concept & simulation materials from the ATHENA EIC proposal
  - A “simple” proximity focusing RICH
  - $n \sim 1.020 - 1.050$  aerogel (perhaps in a two-layer configuration)
  - $\sim 40$  cm long expansion volume
- Convert it into a pfRICH+LAPPD configuration ...
- ... complemented by a high-performance electronics to provide  $\sim 10$ ps timing reference in addition to imaging

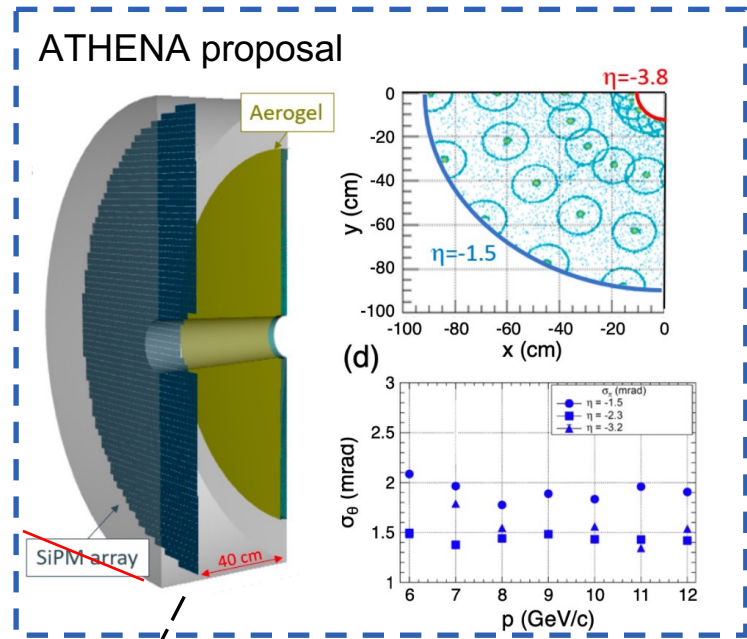

Yellow Report requirement:  
 $3\sigma \pi/K$  separation up to 7 GeV/c

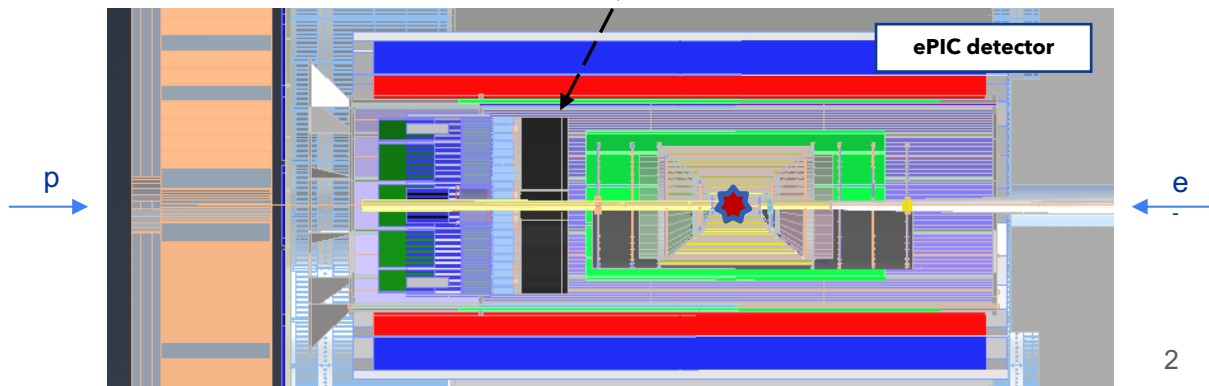


*Design considerations*

# Aerogel




ATHENA configuration:  $\langle n \rangle \sim 1.019$ , acrylic filter with a 350nm cutoff, SiPMs with a peak QE  $\sim 450$  nm  $\rightarrow \langle N_{pe} \rangle \sim 10$

- Consider a different strategy for ePIC pF-RICH (similar to Belle II)
  - Rely on aerogel with a higher refractive index and higher transparency in the near UV range
  - Do not use any acrylic filter
  - Fully exploit HRPPD UV QE range
- EIC project meeting with M.Tabata (Chiba University) in December 2022:
  - Belle II - like aerogel can be produced
  - Refractive index up to  $\sim 1.05$  (ideally: 1.03)
  - Tile size up to  $\sim 20$ cm
  - Smaller sizes can probably even be manufactured with transparent tile sides

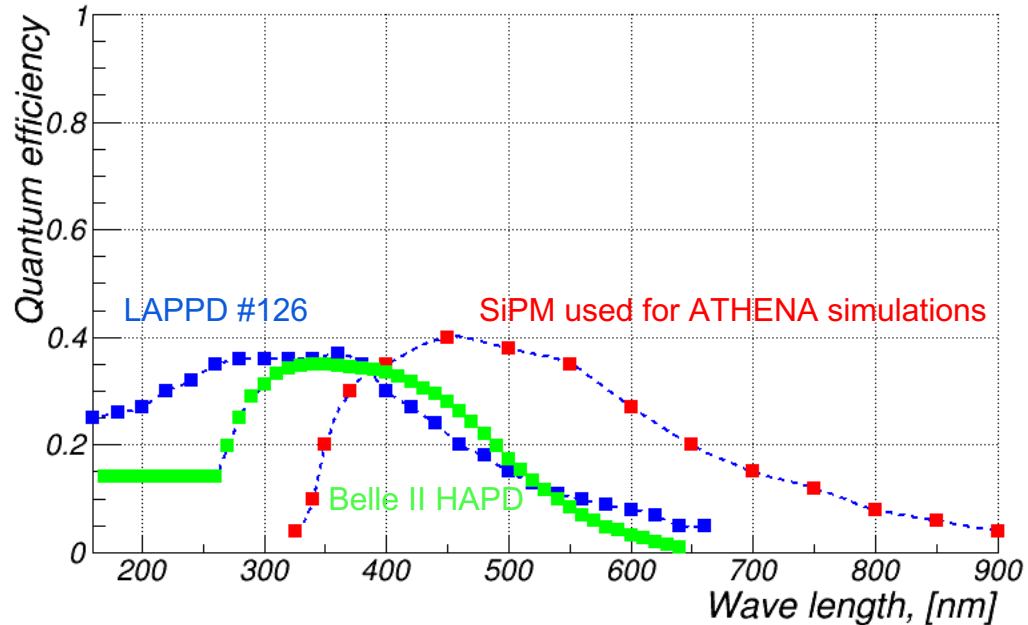

# Photosensors: HRPPDs by Incom Inc.


- Low dark count rate and easier integration (as compared to SiPMs)
- High single photon timing resolution
- Low cost (as compared to other MCP-PMTs)
- Should work well in a  $\sim 1.7$  T field
- High resolution  $t_0$  comes as a bonus (provided by photons produced in the quartz window)

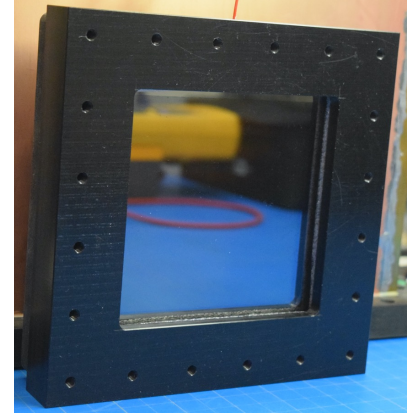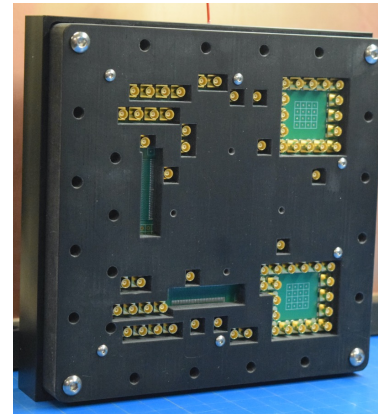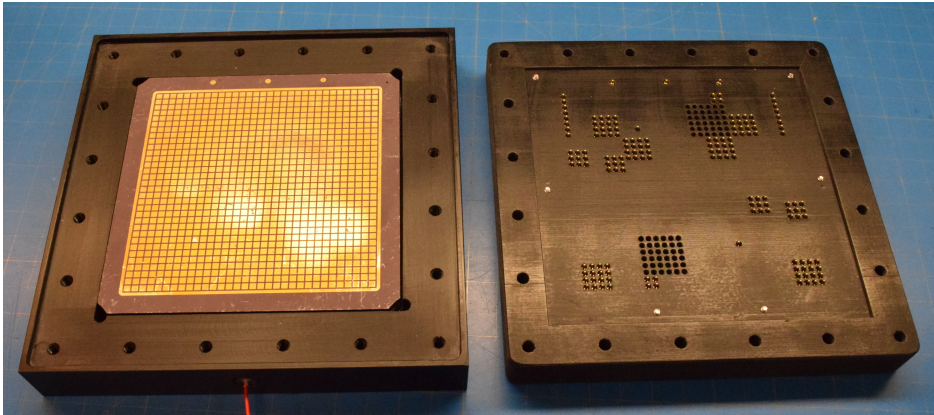


- Most part of the active LAPPD R&D for EIC is done by the pFRICH-affiliated institutions

# Acceptance boundaries optimization


## ATHENA configuration

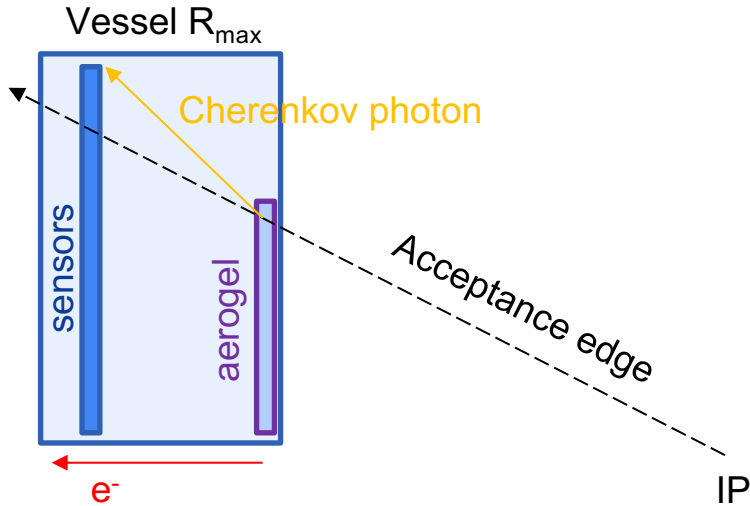

## ePIC configuration

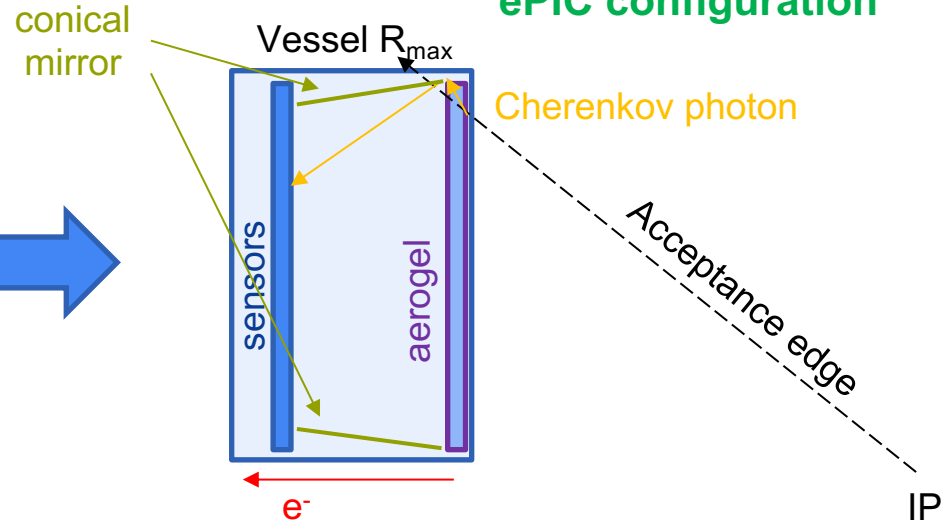


- No reason to lose acceptance *in*  $\eta$ 
  - (1) Increase aerogel radius all the way up to  $\sim R_{\max}$
  - (2) Install a side wall mirror at  $\sim R_{\max}$
- No reason to lose acceptance *on the sensor plane*
  - Use conical mirrors at  $\sim R_{\min}$  &  $\sim R_{\max}$

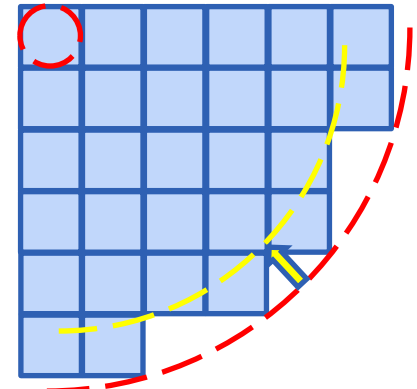

# Geometric efficiency for a $t_0$ reference


High energy charged particle will produce dozens of p.e.'s *in the HRPPD window*

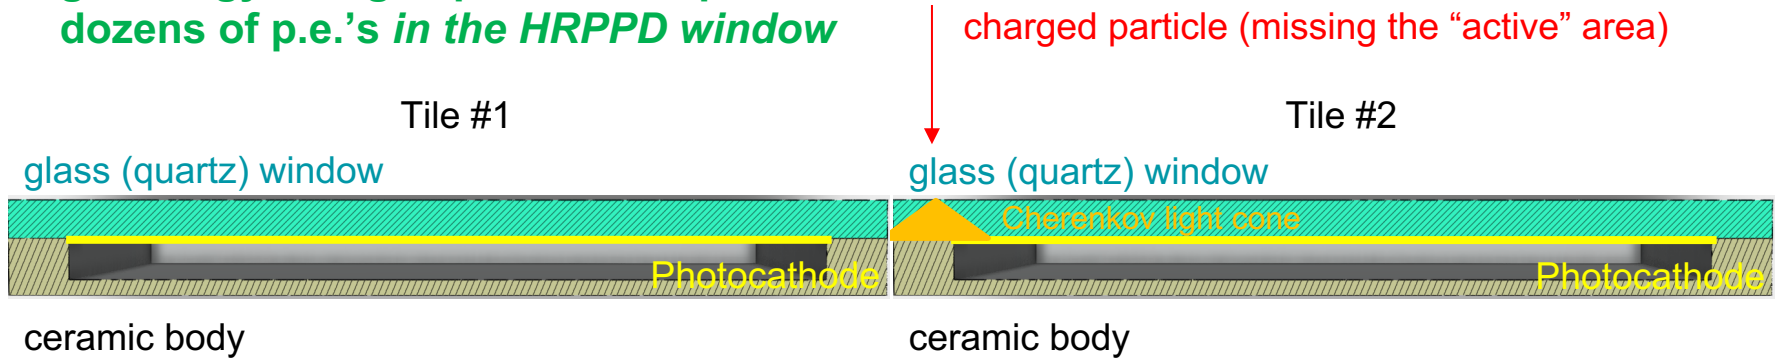

- Even that the HRPPD active area (the photocathode and the MCP stack) is much smaller than the tile footprint, the Cherenkov light cone spot in a 5 mm thick (quartz) window has a base of ~11 mm diameter
- By making the edge area reflective and / or tapered and / or perhaps just relying on a TIR, one should be able to gain timing performance over the whole surface, even though with a degraded resolution towards the tile edges, apparently

**Tiling a flat sensor surface without gaps must be a clear benefit**

# Geometric efficiency for imaging




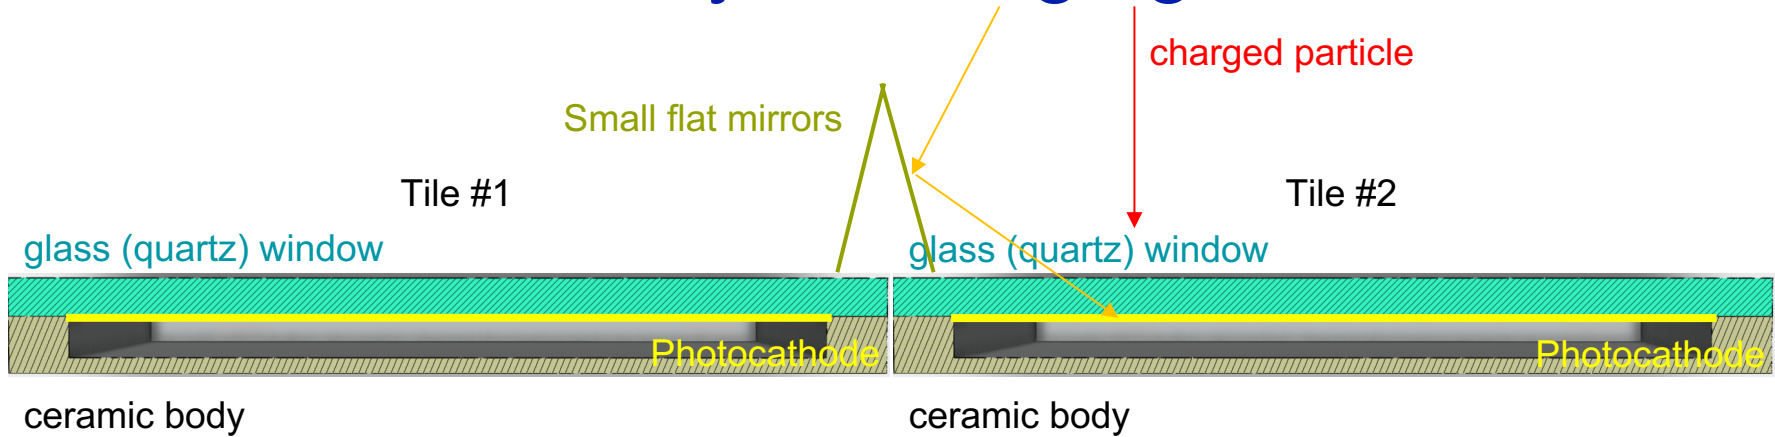


- *If really needed*, one should be able to “save” the Cherenkov photons, which would otherwise miss the photocathode, by funneling them away from the sensor dead area
- The IRT-based reconstruction procedure is already adjusted to handle such cases



# Sensor pixellation

- Given the anticipated ring diameter and  $\langle n_{pe} \rangle$ , expect average hit separation of  $\sim 5$  cm

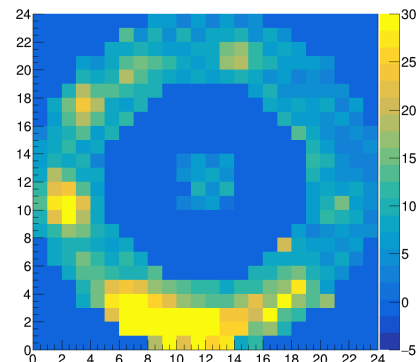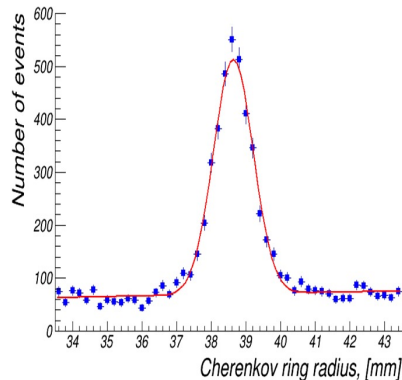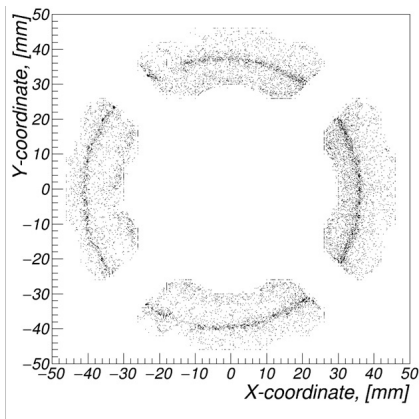
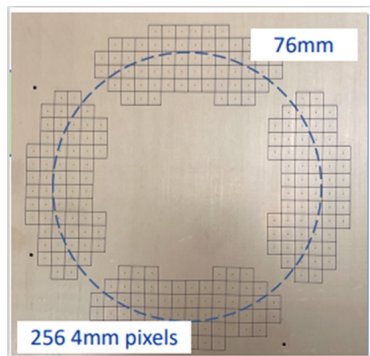


- Capacitively coupled LAPPDs with 4 mm pixellation are good enough to achieve single photon ring radius resolution  $\sim 600 \mu\text{m}$  (beam test data), even without signal pre-amplification

**Consider pixel size of  $\sim 4$  mm as a [temporary] design choice**

# *Integration model*



# Readout electronics concept

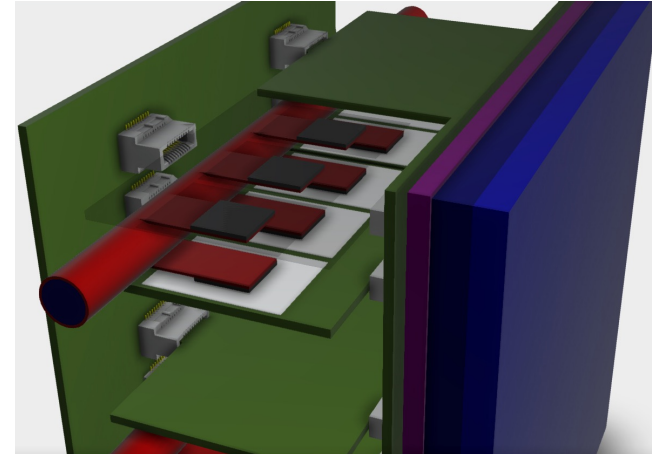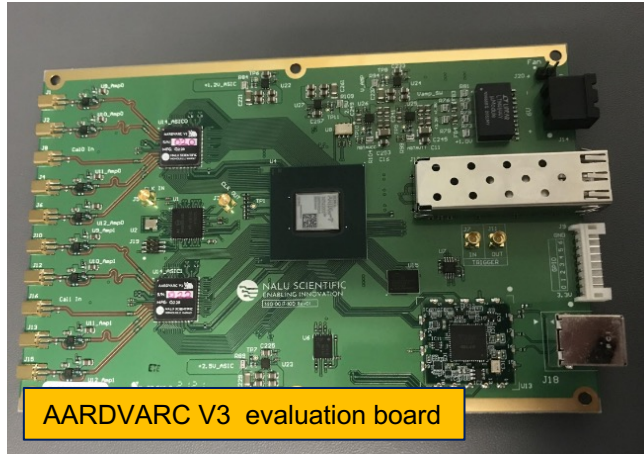

- Assume 24x24 HRPPD pixellation suffices ( $\sim 4.2\text{mm}$  pads)  $\rightarrow$  576 pixels per  $\sim 12 \times 12 \text{ cm}^2$  footprint
- A hybrid of Nalu Scientific UDC and AARDVARC v4 chips assumed as a “reference ASIC”
  - Shown: 16-channel ASICs assumed (would be better to have 32- or 64-channel ones, of course)
  - $\sim 10\text{GS/s}$  digitizer,  $\sim 2\text{GHz}$  ABW, feature extraction, streaming capability (whatever it means), etc.
  - 0dB buffer amplifier (12 mW/ch) available in AARDVARC V4  $\rightarrow$  need a similar solution for a  $\sim 20\text{dB}$  preamp
  - Few kW of power dissipation for the whole pF-RICH-like system seems to be a realistic estimate

**A coordinate effort with eRD109 and other PID subsystems is required**

# Boundary conditions in the ePIC e-endcap

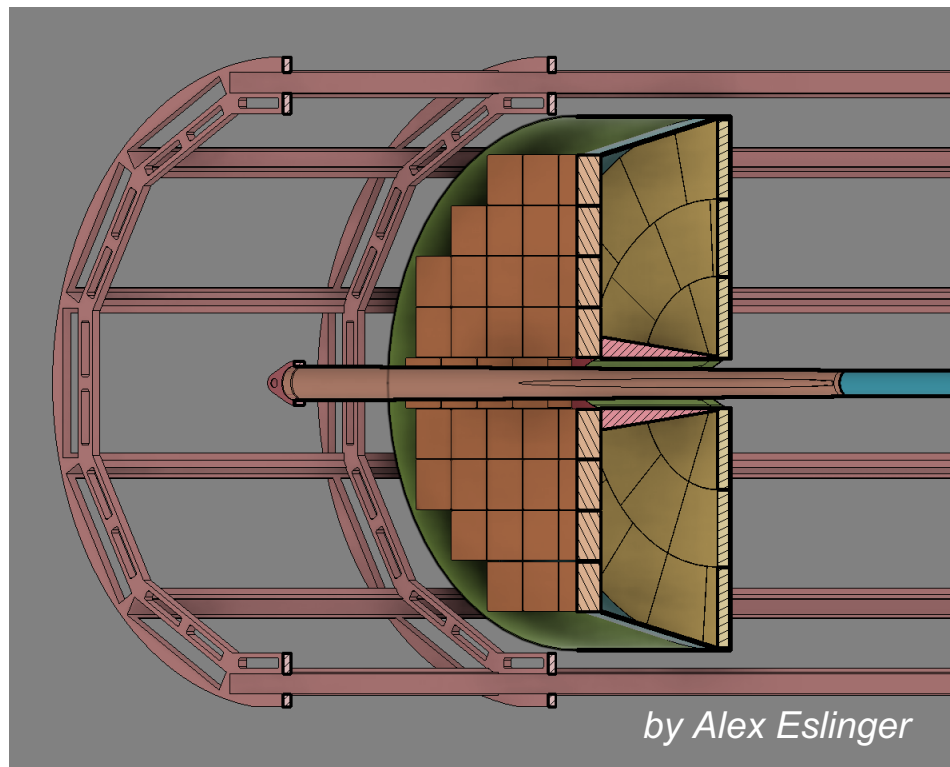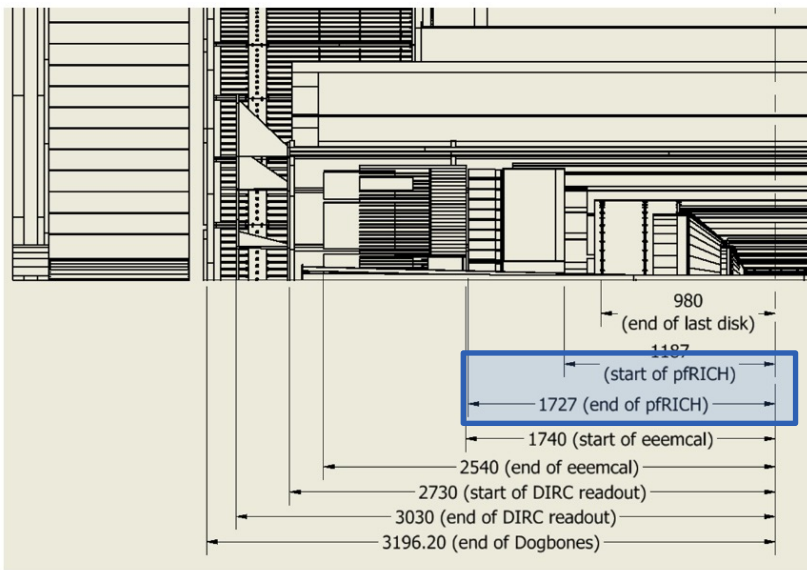


Inner radius	~59 mm
Outer radius	~650 mm
Total length	~540 mm

- Must fit into the DIRC support frame


- Limited length along the beam line
- Severe constraints around the beam pipe

# Integration model

Sensor plane tiling scheme

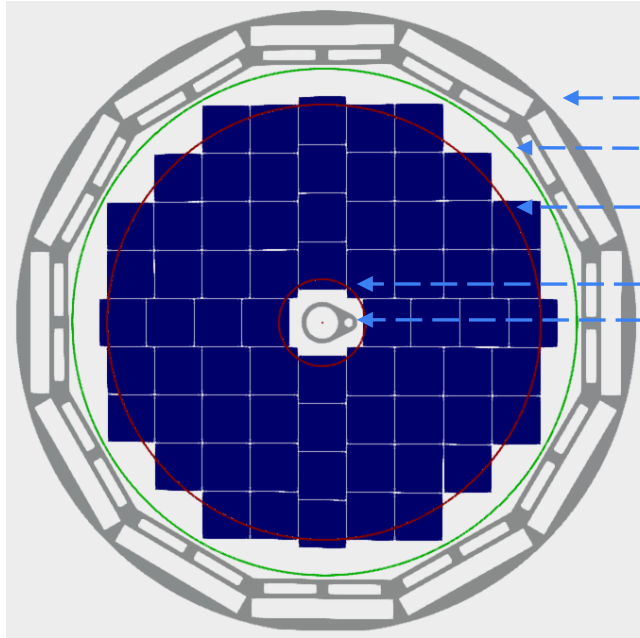

- DIRC frame
- Vessel boundary
- Outer conical mirror
- Inner conical mirror
- Beam pipe flange


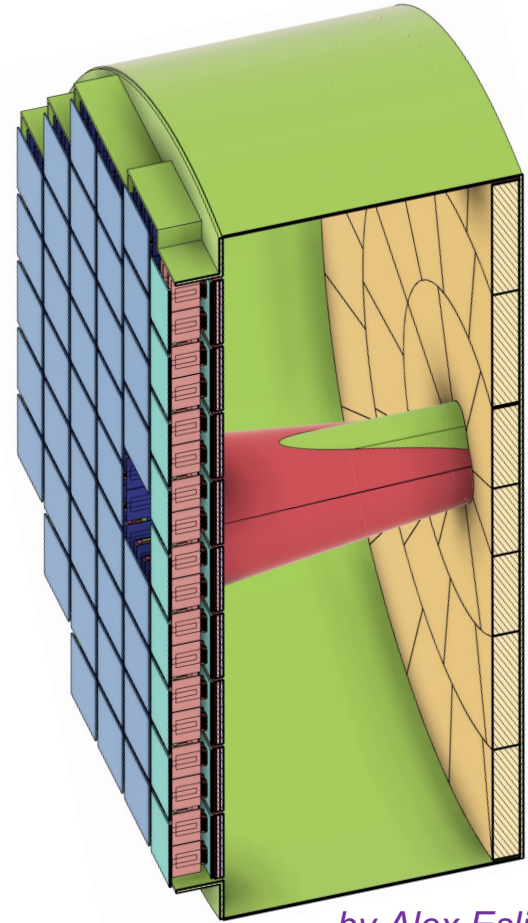


by Alex Eslinger

- A detailed pFRICH CAD model exists
  - Vessel, aerogel, mirrors, sensor plane, electronics mockup
- Services layout and installation procedure require more work

# Services example: HV distribution

by Saverio Minutoli

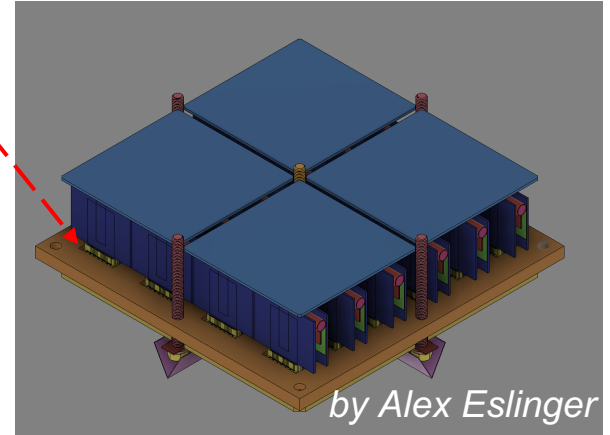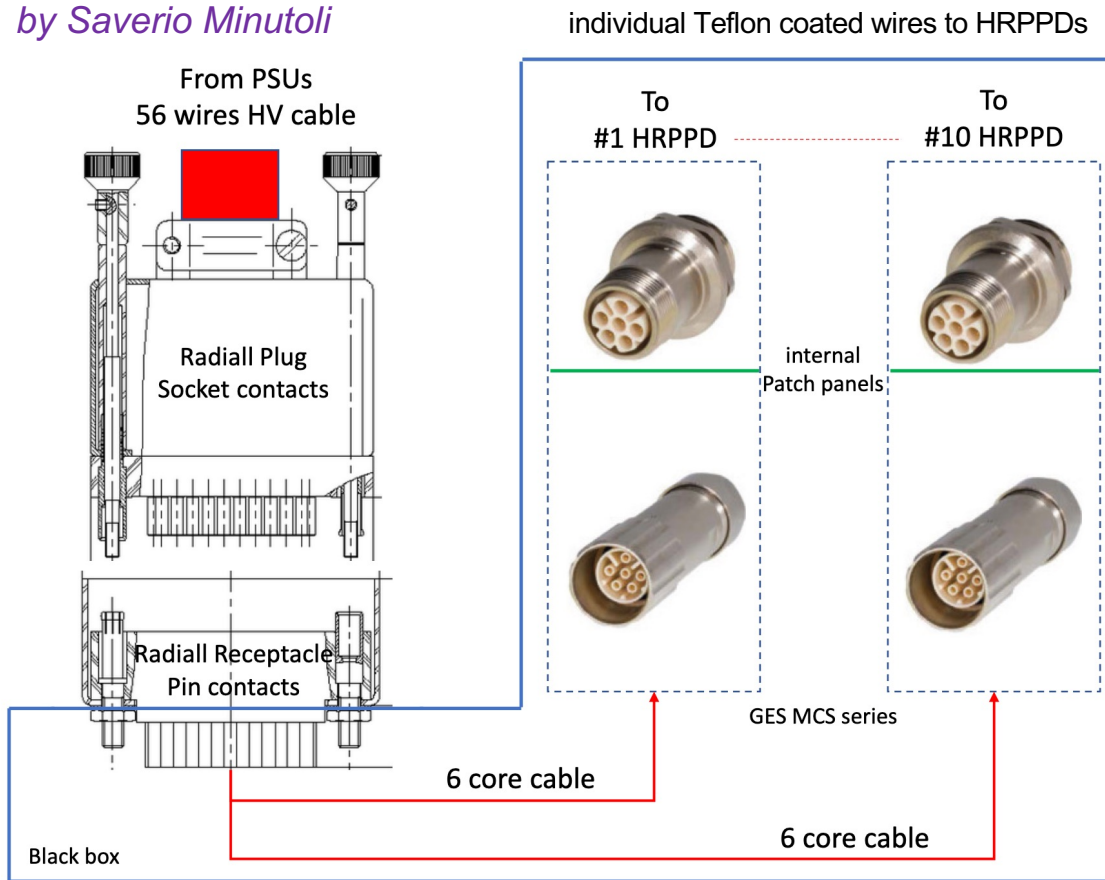


- 68 HRPPD tiles total
- 5 HV levels + ground per tile
- Therefore, need at most ten cables and 52-pin connectors (with spares)

*GEANT implementation*


# Standalone GEANT environment

- Vessel: full available length (54 cm), starting at  $Z = -1187\text{mm}$
- Gas volume filled with nitrogen
- Aerogel: 2 cm thick, segmented in  $<20$  cm blocks
- $\langle n \rangle \sim 1.044$  (Belle II parameterization)
- No acrylic filter
- Sensor plane at 12 cm from the rear side of the vessel
- Detailed HRPPD description (window, photocathode layer)
- QE plot as provided by Incom + 70% safety factor
- Tile segmentation matching suggested HRPPD formfactor
- Active area 80% of the tile footprint, as suggested by Incom for future HRPPD models
- IRT: conical & pyramid mirrors (and multiple optical paths per sensor) implemented

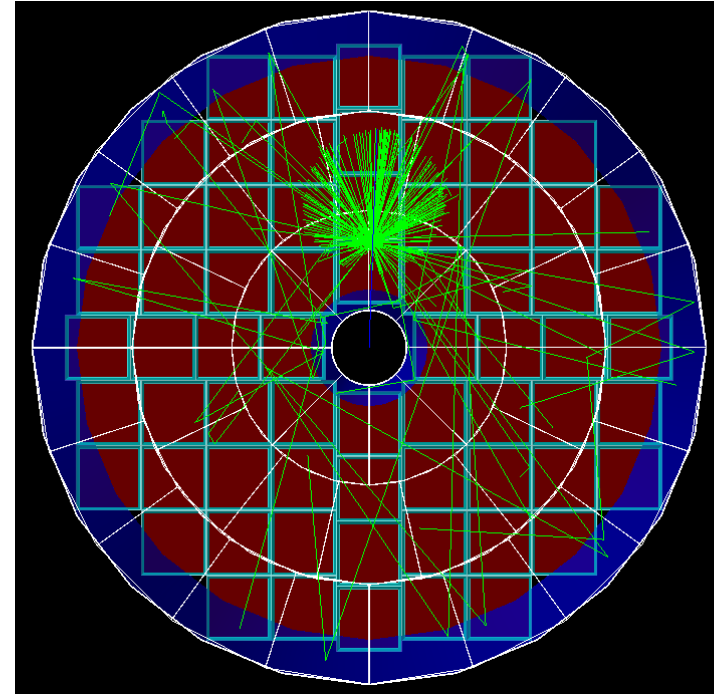





# Accumulated Cherenkov ring images

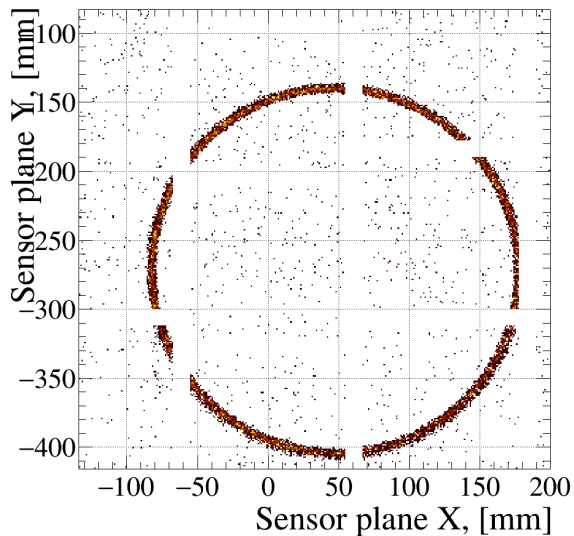

Full ~240mm diameter rings at  $\eta = -2.5$

$\eta = -2.0$ : part of the ring is reflected by a conical mirror

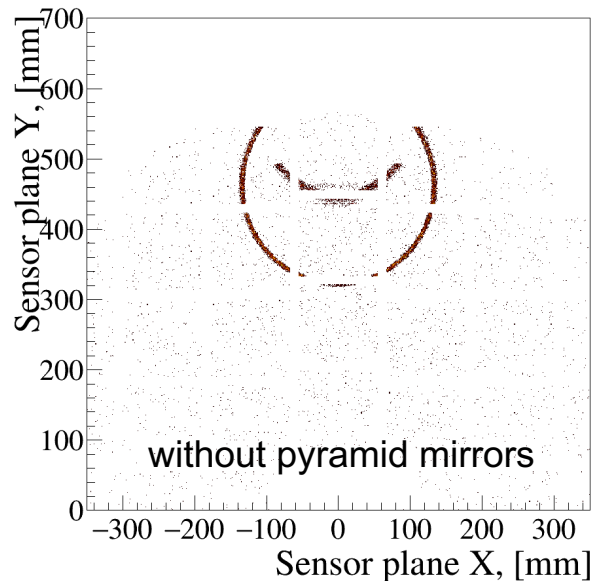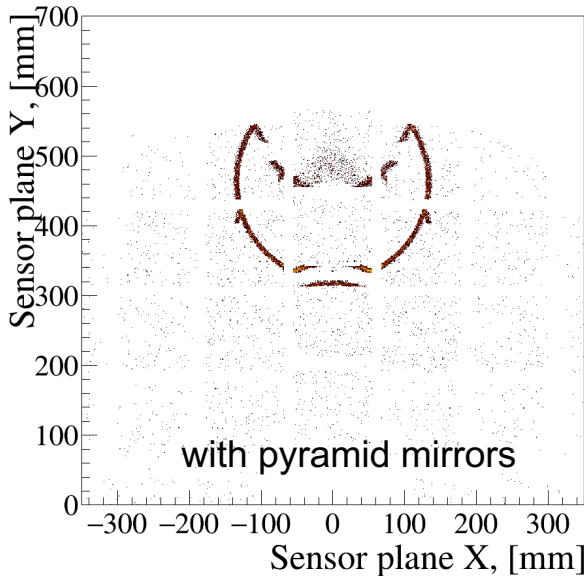


*by Chandra Chatterjee*


**Default configuration: with inner and outer conical mirrors, but no pyramid ones**

# Performance plot examples


A combination of a more UV-transparent aerogel and HRPPD UV-extended QE spectrum can be a winning strategy, even that  $\pi/K$  gap at high momenta gets smaller as compared to the ATHENA case ( $\langle n \rangle \sim 1.019$ , SiPM peak QE @ 450 nm)

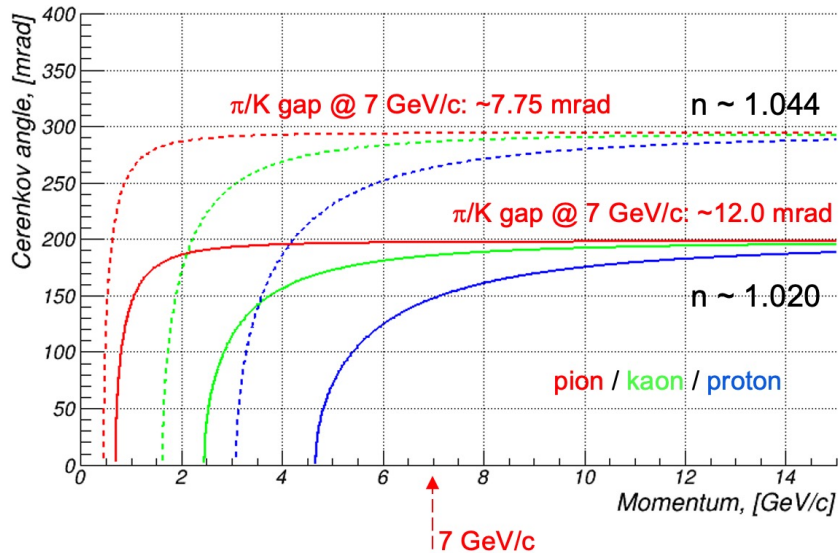

$> 7 \sigma$   $\pi/K$  separation @ 7 GeV/c

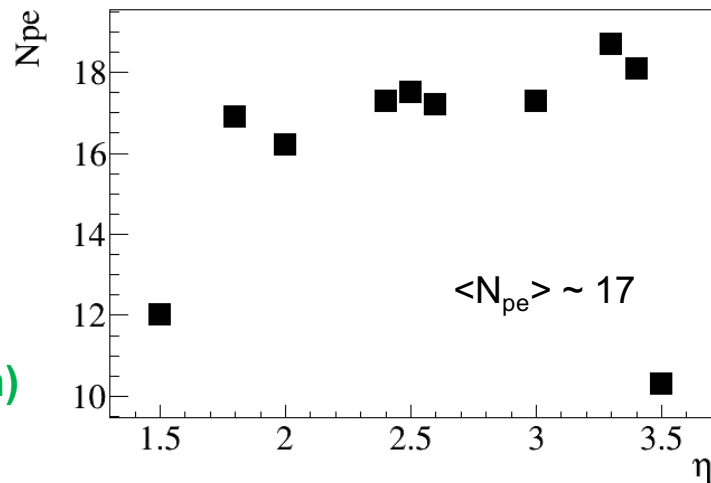


by Chandra Chatterjee

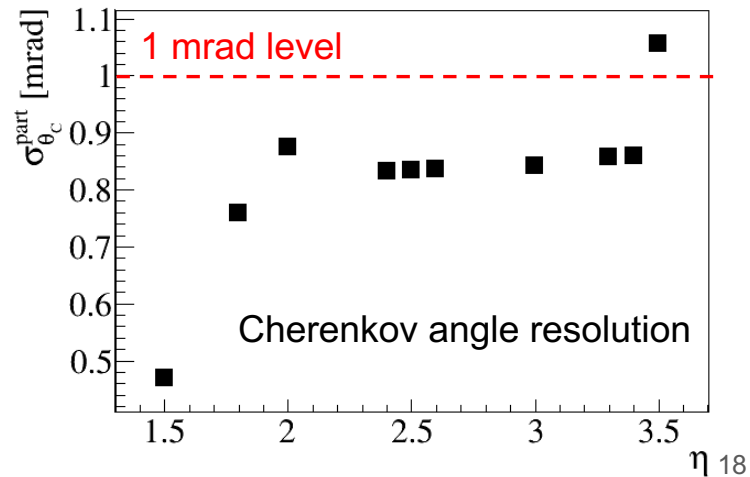

# Fallback options

- In case ...
  - Tracker requests some space back (and pFRICH ends up with <40cm long expansion volume)
  - HRPPD *PDE* turns out to be substantially smaller than ~30%
  - A higher level of  $\pi/K$  separation at and above 7 GeV/c is required
- ... one can also consider *more sophisticated extensions*
  - Flat funneling mirrors in the acceptance
  - Dual aerogel configuration a la Belle II
- Fresnel lenses in an open-vessel configuration?




*Other studies*

# Mixed EICrecon / “Delphes” environment

by Kong Tu

- First create Delphes-like PID smearing matrices using standalone GEANT4 detector-level modeling
- Then use EPIC official software stack

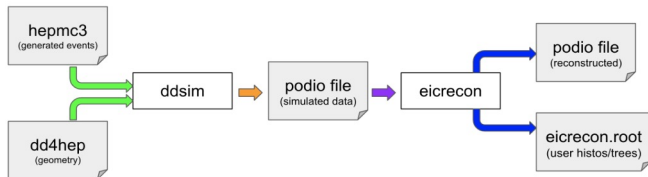

- With “eicrecon.root” & access to full reco’d tracks, apply pFRICH *delphes-like* parametrization for PID.
- We can make use of the official simulation campaign files (single particle, DIS, SIDIS, etc.)

Search or jump to... Pull requests Issues Marketplace Explore

KongTu / EICreconOutputReader Public

Code Issues Pull requests Actions Projects Wiki Security Insights Settings

main EICreconOutputReader / README.md

KongTu Update README.md Latest commit 6e44b16 28 seconds ago History

1 contributor

14 Lines (9 sloc) 472 Bytes

### EICreconOutputReader

contact – Kong Tu (kongtu@bnl.gov)

This is a reader code to analyze EIC reconstructed data or MC. The detail instructions will be documented along the development.

One can use pFRICH-configs to study backward PID capability.

To get started:

- look into getInputFromS3.sh to modify accordingly what to grab from S3; `./getInputFromS3.sh`
- Run the singleParticleReader: `./runSingleParticleReader.sh input/INPUT_NAME.root OUTPUT_NAME`

Give feedback


<https://github.com/KongTu/EICreconOutputReader>

Work in progress by Kong, Jan Vanek and Chandra

# Magnetic field @ HRPPD location

by Zhengqiao Zhang

- Tolerance to the magnetic field *strength* is not the whole story
- Field *direction* should be reasonably aligned with the normal to sensor surface

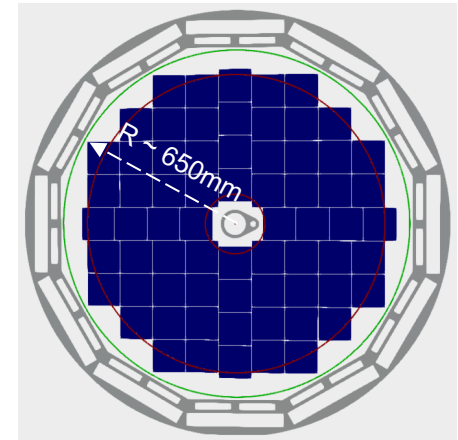

• Oba et al., 1981

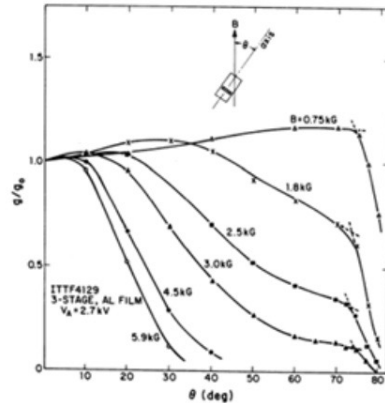


Fig. 11. Dependency of the output degradation in F4129 on the off-axis magnetic field.


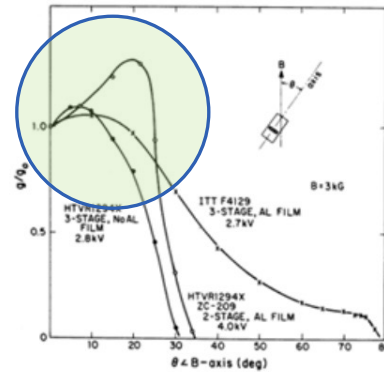


Fig. 10. Output degradation in three MCP-PMTs in the off-axis magnetic field.

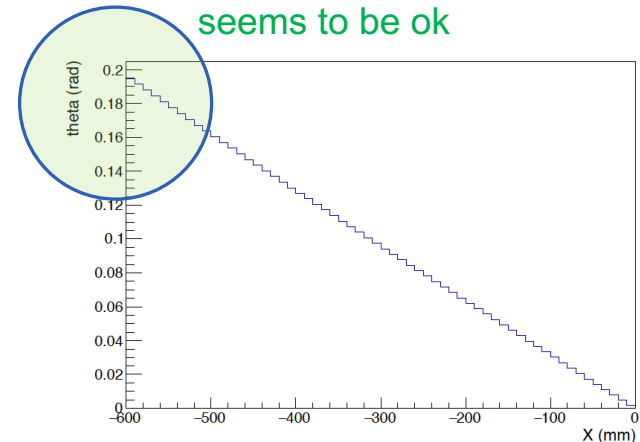


pFRICH: field-to-sensor-normal angle

Direct measurements at Argonne will be done in March

# Occupancy studies


Particle Pairwise Distance:  $-4 < \eta < -1$

Blue = distance between each pair of particles in acceptance  
Red = distance between closest two particles in acceptance  
Green = same as red, but for events with electron in acceptance

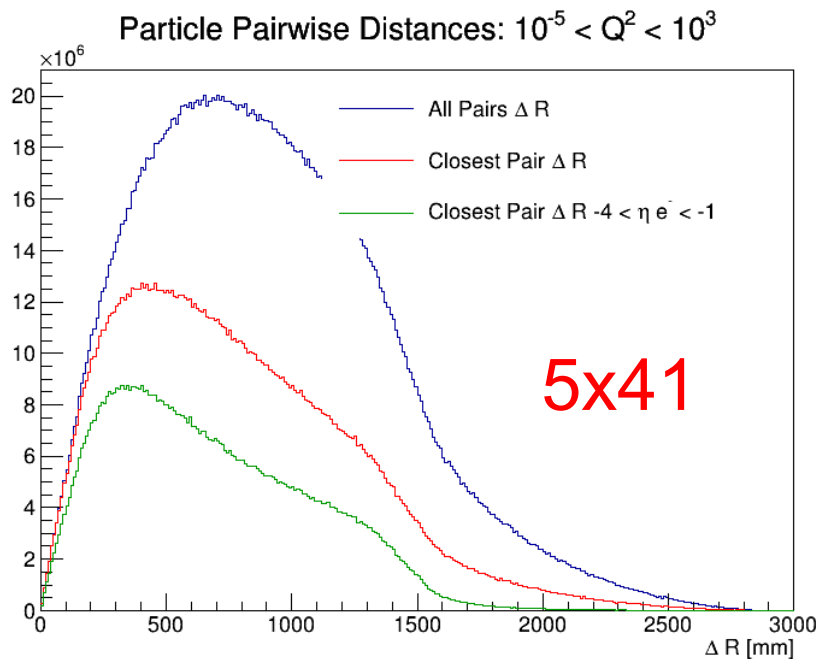

Distance is in x-y plane at a z position of -1700 mm from the interaction point

by Brian Page

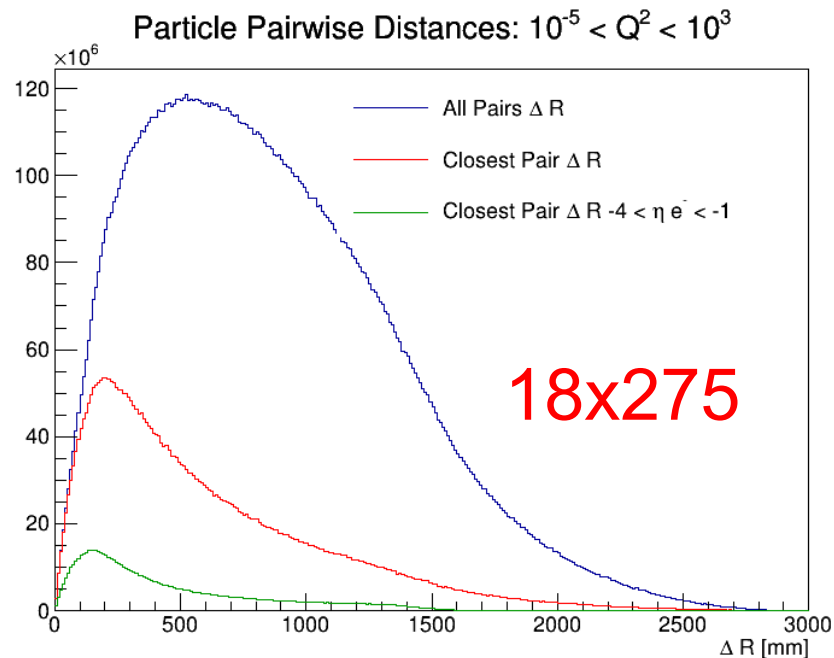

# Summary

- Work on the proximity focusing RICH for ePIC e-endcap is well advanced
  - Design choices
  - GEANT simulations
  - CAD model and integration
  - Several other accompanying studies
- We will be certainly ready for the March Collaboration review

Indico category: <https://indico.bnl.gov/category/458/>


Mailing list: eic-projdet-pfrich-l@lists.bnl.gov



*Backup*

# Wavelength range

- Is it really hopeless to work with aerogel in a deep UV range?

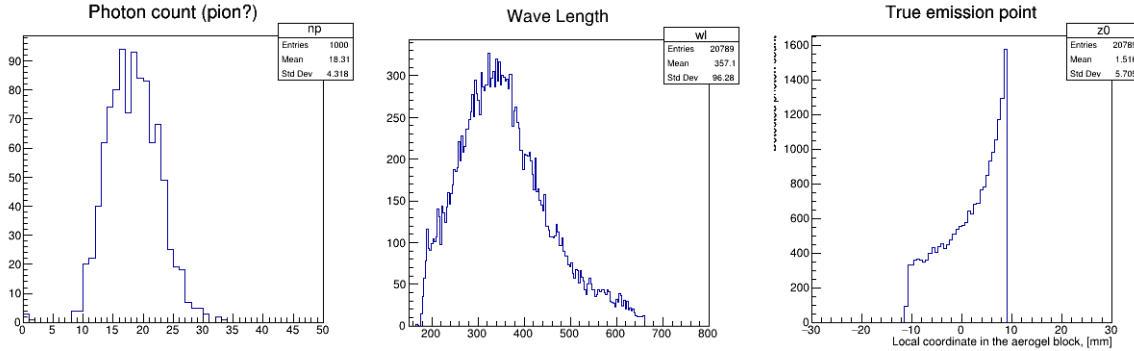

Belle II aerogel#1 in pFRICH GEANT simulations

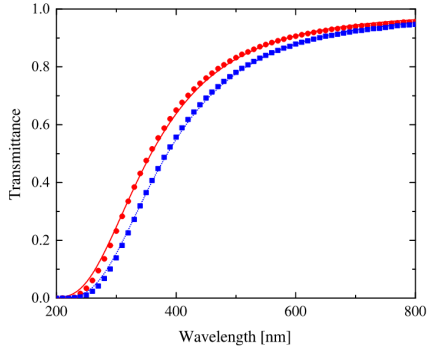



Fig. 2. Transmittance as a function of wavelength for the Belle II RICH aerogel samples of  $n = 1.045$  (red) and  $1.055$  (blue) [2]. The thickness for both samples is 20 mm. (For interpretation of the references to color in this figure legend, the reader is referred to the web version of this article.)

```
<Property name="ABSLLENGTH" unit="eV">
<value energy="7.75">1.64386</value>
<value energy="6.88889">5.77248</value>
<value energy="5.91945">11.8578</value>
<value energy="5.42017">15.8411</value>
<value energy="5.17722">21.314</value>
```

~5mm @ 180nm (units: [mm])

$$\frac{dE}{dx} = 4\pi^2 e^2 \int_{\beta n > 1} \frac{1}{\lambda^3} \left(1 - \frac{1}{\beta^2 n^2}\right) d\lambda$$

~5mm @ 250nm (units: [mm])

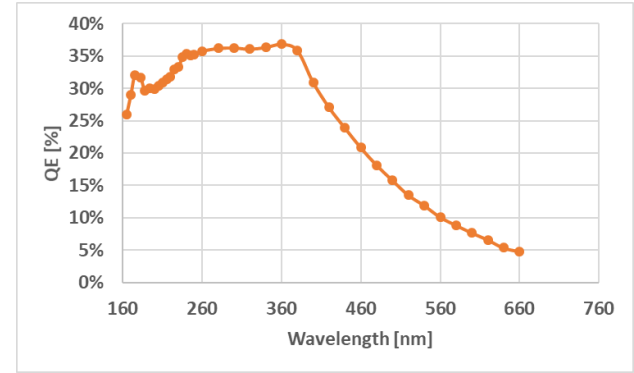


HRPPD 126 QE curve

```
<Property name="RAYLEIGH" unit="eV">
<value energy="1.500">495.305</value>
<value energy="1.675">368.992</value>
<value energy="1.850">276.148</value>
<value energy="2.025">208.910</value>
<value energy="2.200">159.280</value>
<value energy="2.375">122.311</value>
<value energy="2.550">94.4909</value>
<value energy="2.725">73.5915</value>
<value energy="2.900">58.2796</value>
<value energy="3.075">46.5131</value>
<value energy="3.250">37.2842</value>
<value energy="3.425">30.1133</value>
<value energy="3.600">24.4282</value>
<value energy="3.775">19.7740</value>
<value energy="3.950">16.1085</value>
<value energy="4.125">13.0108</value>
<value energy="4.300">10.6804</value>
<value energy="4.475">8.74212</value>
<value energy="4.650">7.22615</value>
<value energy="4.825">6.03070</value>
<value energy="5.000">5.02443</value>
<value energy="5.175">4.3785</value>
<value energy="5.350">3.8331</value>
<value energy="5.525">3.3701</value>
<value energy="5.700">2.9749</value>
```


Obviously, more studies needed

# HRPPD re-design effort for EIC


Variety of HRPPD anode base plate pixellation, with 40-pin Samtec connector footprints on the outer side

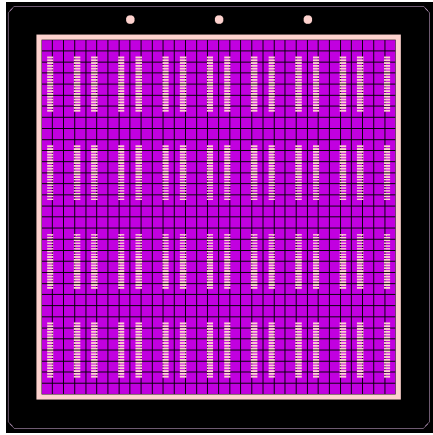


32 x 32 square pads  
(present layout)

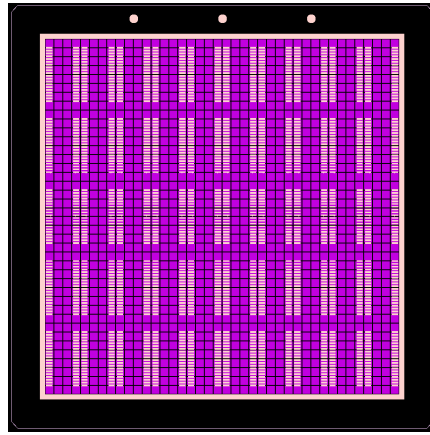

40 x 40 square pads  
(DIRC)

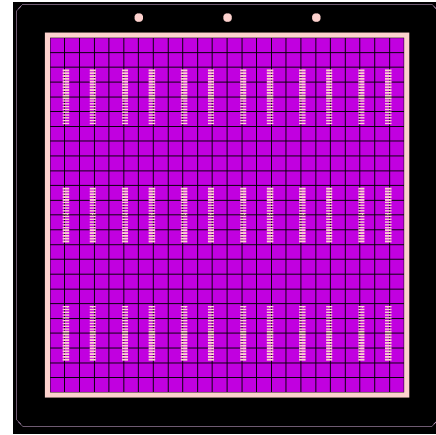

24 x 24 square pads  
(pfRICH)

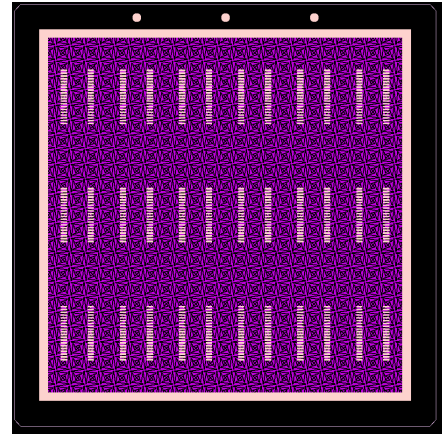


24 x 24 charge sharing  
pads (pfRICH)


- Polish ceramic manufacturer (Techtra) can produce such layouts in house
- First iteration will be a test bench HRPPD tile with a mixed layout, to test them all at once
  - AK to provide a final set of drawings for this layout
  - Tooling and fabrication will take 2-3 months

# HRPPD re-design effort for EIC

pad (inner) size

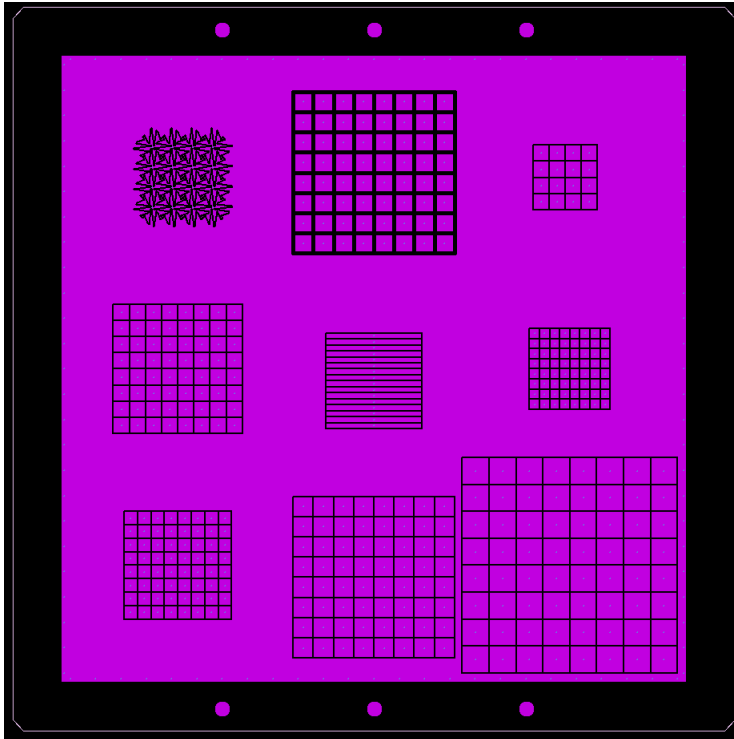

connector (outer) side

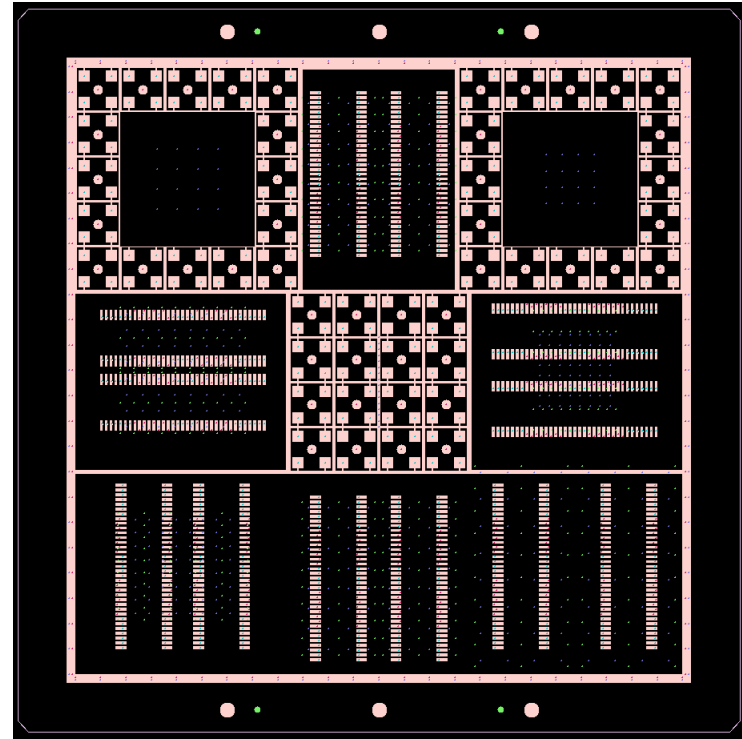

- Will use existing side walls / windows; pad size tuned to the new active area size of 108 mm
- Pixellation patterns 24x24, 32x32, 40x40, 48x48, 64x64 + 1D charge cloud profiling field